

## ALUMINUM TRUNNION SUPPORT FOR ADSS CABLE

- Trunnion is casted from high strength Aluminum.
- Can be banded (1-1/4" wide X 0.043" thick) to concrete or fiberglass poles or fastened to a wood pole with a 5/8" Square Head Machine Bolt.
- The recommended maximum line angle is 20°.
- The cushioned inserts gently grip the cable without causing damage.
- In stringing applications, the inserts can be removed and cable can rest loosely in housing.




PART #	DESCRIPTION	INCHES	MILLIMETERS	PACKAGE QTY.	CARTON QTY.	COLOR
9700-1	ALUMINUM TRUNNION SUPPORT FOR ADSS CABLE	.420"-.474"	10.67-12.05	1	4	BLACK
9700-2	ALUMINUM TRUNNION SUPPORT FOR ADSS CABLE	.475"-.525"	12.07-13.34	1	4	BLUE
9700-3	ALUMINUM TRUNNION SUPPORT FOR ADSS CABLE	.526"-.575"	13.35-14.61	1	4	ORANGE
9700-4	ALUMINUM TRUNNION SUPPORT FOR ADSS CABLE	.576"-.625"	14.63-15.88	1	4	BROWN
9700-5	ALUMINUM TRUNNION SUPPORT FOR ADSS CABLE	.626"-.675"	15.90-17.15	1	4	GREEN
9700-6	ALUMINUM TRUNNION SUPPORT FOR ADSS CABLE	.676"-.725"	17.17-18.42	1	4	WHITE
9700-7	ALUMINUM TRUNNION SUPPORT FOR ADSS CABLE	.726"-.775"	18.44-19.69	1	4	RED
9700-8	ALUMINUM TRUNNION SUPPORT FOR ADSS CABLE	.776"-.825"	19.71-20.96	1	4	PURPLE
9700-9	ALUMINUM TRUNNION SUPPORT FOR ADSS CABLE	.826"-.875"	20.98-22.23	1	4	YELLOW
9700-10	ALUMINUM TRUNNION SUPPORT FOR ADSS CABLE	.876"-.925"	22.25-23.50	1	4	PINK




## ALUMINUM TRUNNION SUPPORT FOR ADSS CABLE

### Bolted Application

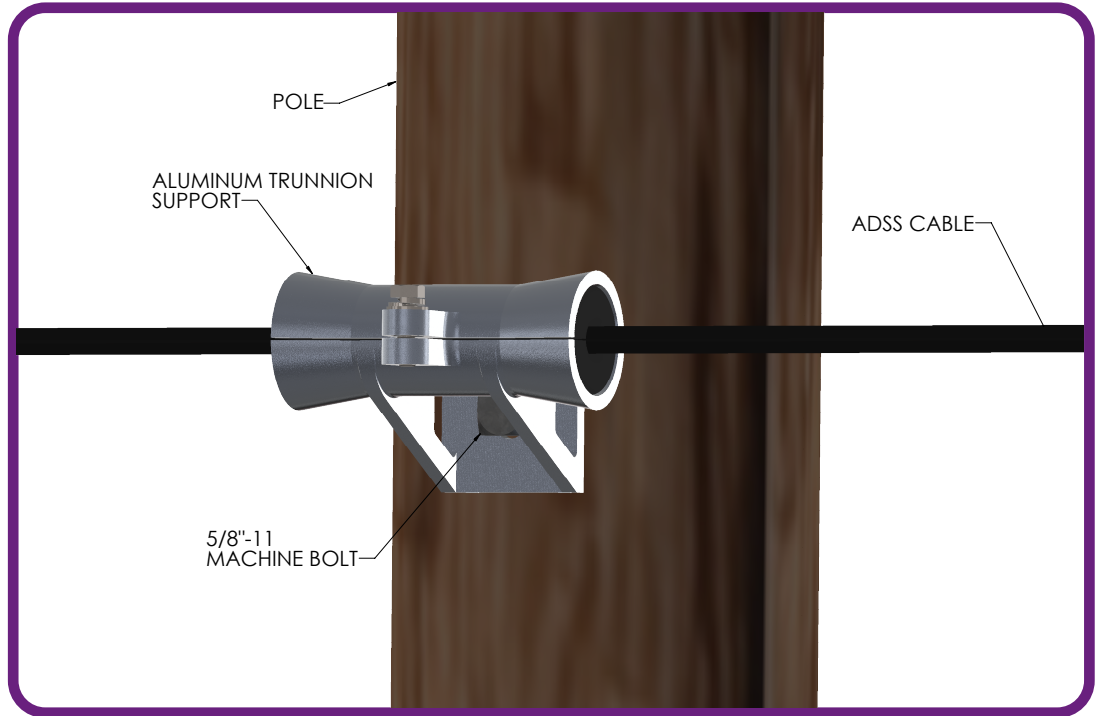

### Banded Application

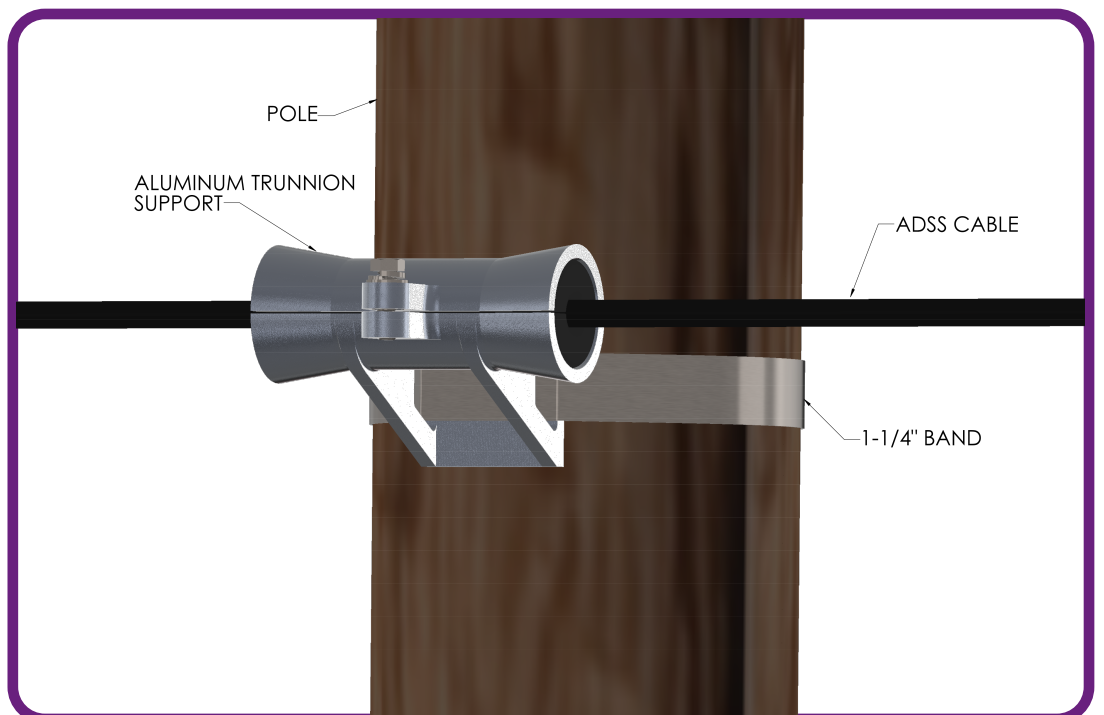

3000 Marcus Ave., Suite 3E09  
Lake Success, NY 11042  
516.512.7600 . Fax: 516.512.7611